

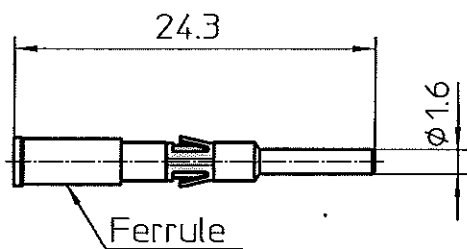
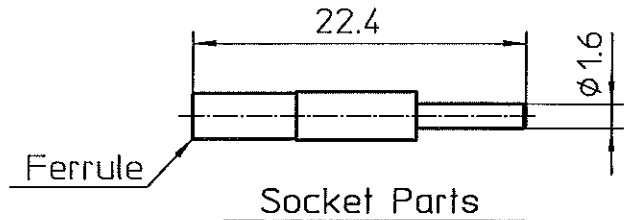


TOLERANCES  
UNLESS OTHERWISE SPECIFIED : ±0.3

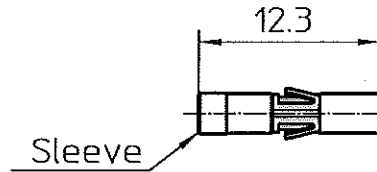

Pin contact

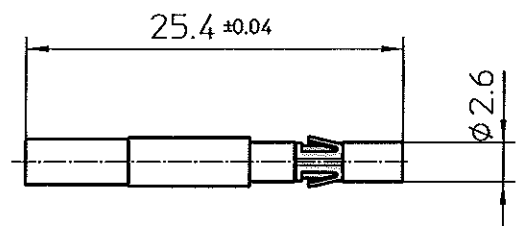


Socket contact  
(After Assembly)

	Contact P/N		Clad φ(μm)	Sheath φ(mm)	Assembly Tool	Extraction Tool
	Pin	Socket				
POF	RMPOF-1000	RCPOF-1000B	1000	2.2	SEE Note2	RX20-25V2J or RX20-25JG1
PCF	RMPCF-230	RCPCF-230B	230			

Note

1. Material Ferrule/Sleeve : Brass Nickel Plated  
Retaining spring : BeCu
2. Assembly tool  
Socket contact press fit tool : T-RCPF3H01  
Contact crimping tool : 80WS-0002 (not required for PCF)  
Contact us about other assembly tool as follows.  
(Stripping tool, Polishing disk, Polishing paper, etc.)
3. Assembly Manual  
IJM-POF 02 / IJM-PCF 02

					SCALE	∞	Optical fiber contact	
					DIM. IN	mm	CAT. NO.	
					DESIGNED		RC/RM____-____/B	
					DRAWN	S.Ohnuki	DRAWING NO.	REV.
2	'06 12-15	Low Material/ Callog No.Changed.	<i>(Signature)</i>		CHECKED	M.Ishii	IJSA 00176	2
1	'05 4-28	PCF Callog No.Changed.	S.O M.I		APPROVED	M.Ishii	 <b>SOURIAU</b> Japan K.K.	
REV.	DATE	DESCRIPTION	DWN. APPD.	DATE	'05-2-10			