

f; 0; RL

**MATERIAL:**

Body : Polyamid UL94 V-0


Elastomer link: Elastomer□□

**NOTES :**

-Operating temperature : -40° up to +105°


-This cap is a water and dust protected version.

-Level sealing : IP68 (1bar during 1 week)

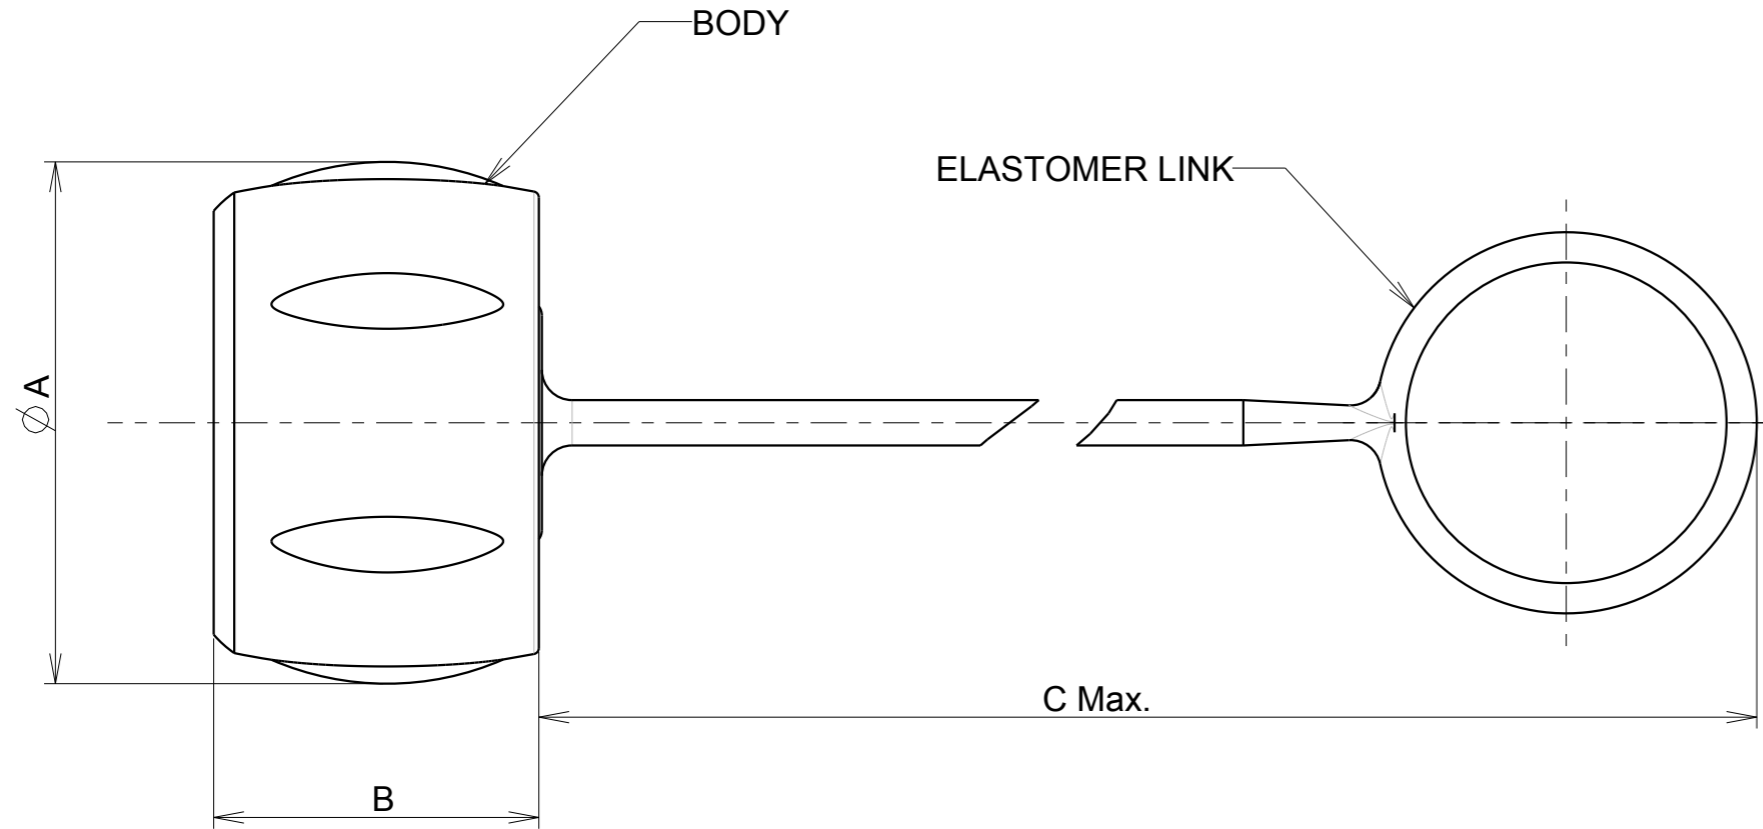

PART NUMBER	∅ A	B	C max.
UTS8DCG	22.10	16.50	99 Max
UTS10DCG	26.20	18.40	121 max.
UTS12DCG	29.70	19.60	123 max.
UTS14DCG	34.60	21.50	125 max.
UTS18DCG	42	23	132 max.

P/N : UTSXXDCG

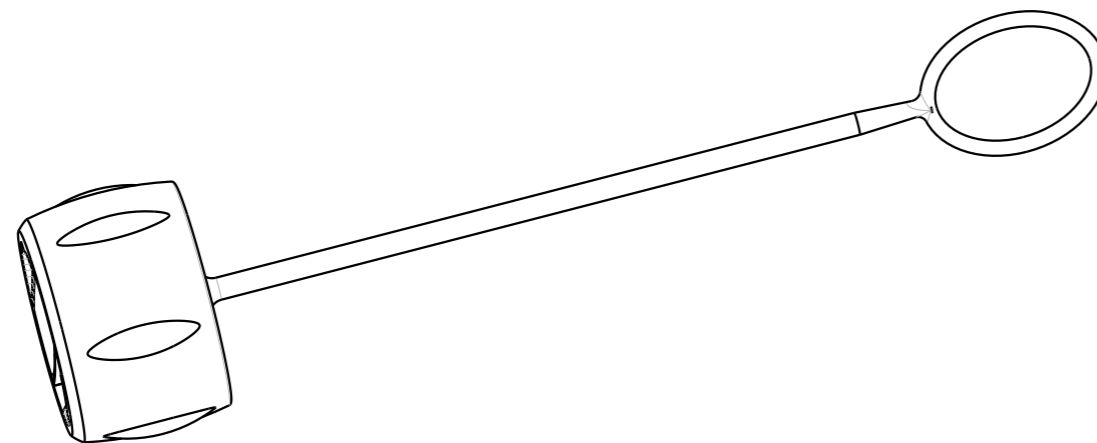

f	21/06/2013	Modification of sealing level		22980
ISS	DATE	Latest modification - by: BERTHOME A.		MOD N°
Designed by: <i>SORIN V</i>		Date: 19/04/06	CUSTOMER DRAWING	
TITLE		UTS RECEPTACLE SEALING CAP WITH ELASTOMER LINK		
Scale	2/1	General linear Tolerances: ± 0.4	NPRDS / PROJECT UTS1	
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	A3	SOURIAU DRG N° C003-UTS1-A		SHEET 1/1

NOT EXPORT CONTROLLED